

# Specification of Thermoelectric Module

## TEC1-127035

### Description

The 71 couples, 40mm x 40mm size module is a single stage module which is made of our high performance ingot to achieve superior cooling performance and 70°C or larger delta Tmax, is designed for superior cooling and heating applications. Beyond the standard below, we can design and manufacture the custom made module according to your special requirements.

### Features

- No moving parts, no noise, and solid-state
- Compact structure, small in size, light in weight
- Environmental friendly
- RoHS compliant
- Precise temperature control
- Exceptionally reliable in quality, high performance

### Application


- Food and beverage service refrigerator
- Portable cooler box for cars
- Liquid cooling
- Temperature stabilizer
- CPU cooler and scientific instrument
- Photonic and medical systems

### Performance Specification Sheet

Th (°C)	27	50	Hot side temperature at environment: dry air, N <sub>2</sub>
DT <sub>max</sub> (°C)	70	79	Temperature Difference between cold and hot side of the module when cooling capacity is zero at cold side
U <sub>max</sub> (Voltage)	15.6	16.9	Voltage applied to the module at DT <sub>max</sub>
I <sub>max</sub> (Amps)	3.6	3.6	DC current through the modules at DT <sub>max</sub>
Q <sub>Cmax</sub> (Watts)	36.8	39.6	Cooling capacity at cold side of the module under DT=0 °C
AC resistance (Ohms)	3.30	3.55	The module resistance is tested under AC
Tolerance (%)	± 10		For thermal and electricity parameters

### Geometric Characteristics

Dimensions in millimeters

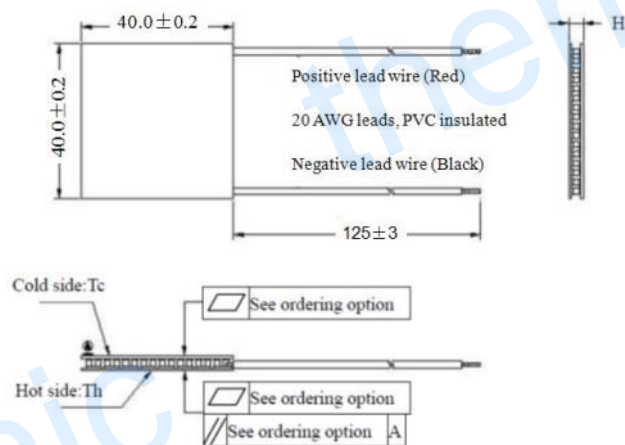

### Manufacturing Options

#### A. Solder:

1. T100: BiSn (T<sub>melt</sub>=138°C)
2. T200: CuSn (T<sub>melt</sub>=227°C)

#### B. Sealant:

1. NS: No sealing (Standard)
2. SS: Silicone sealant
3. EPS: Epoxy sealant
4. Customer specify sealing

#### C. Ceramics:

1. Alumina (Al<sub>2</sub>O<sub>3</sub>, white 96%)
2. Aluminum Nitride (AlN)

#### D. Ceramics Surface Options:

1. Blank ceramics (not metallized)
2. Metallized

### Ordering Option

Suffix	Thickness H (mm)	Flatness/ Parallelism (mm)	Lead wire length(mm) Standard/Optional length
TF	0: 4.7 ± 0.1	0: 0.08/0.08	125±3/Specify
TF	1: 4.7 ± 0.05	1: 0.05/0.05	125±3/Specify
TF	2: 4.7 ± 0.03	2: 0.03/0.03	125±3/Specify

Eg. TF11: Thickness 4.7 ± 0.05 (mm) and Flatness 0.05/0.05 (mm)


Creative technology with fine manufacturing processes provides you the reliable and quality products

Tel: +86-791-88198288 Fax: +86-791-88198308 Email: [sales@thermonamic.com.cn](mailto:sales@thermonamic.com.cn) Web Site: [www.thermonamic.com.cn](http://www.thermonamic.com.cn)


# Specification of Thermoelectric Module

TEC1-127035



Performance Curves at  $T_h=27^\circ\text{C}$

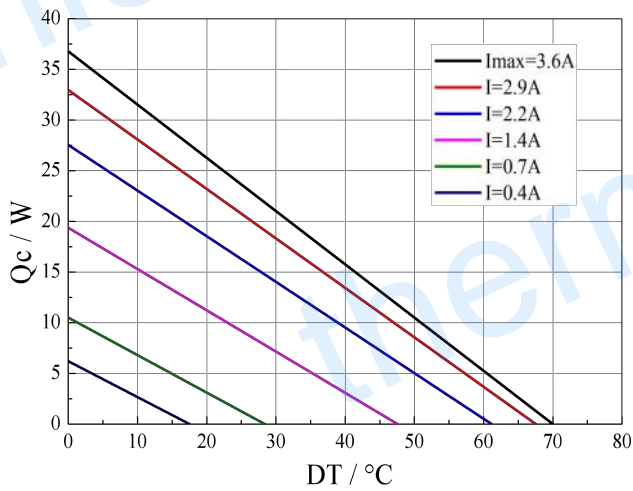



Performance Curves at  $T_h=50^\circ\text{C}$

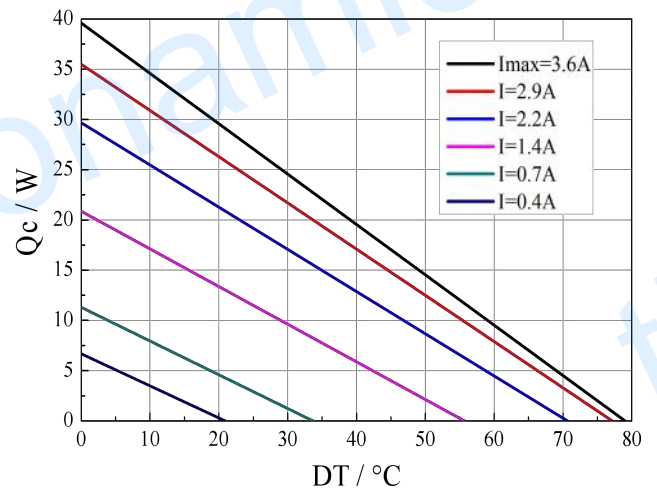

Standard Performance Graph  $Q_c = f(DT)$

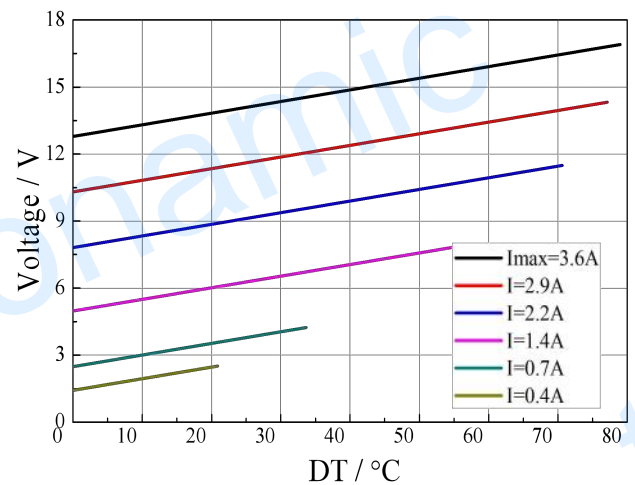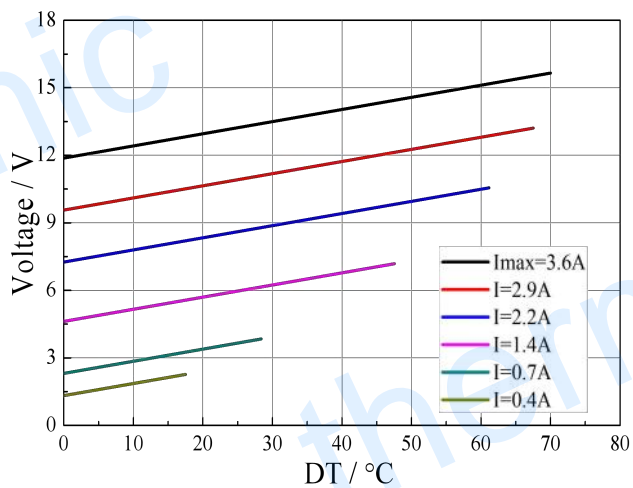

Standard Performance Graph  $V = f(DT)$

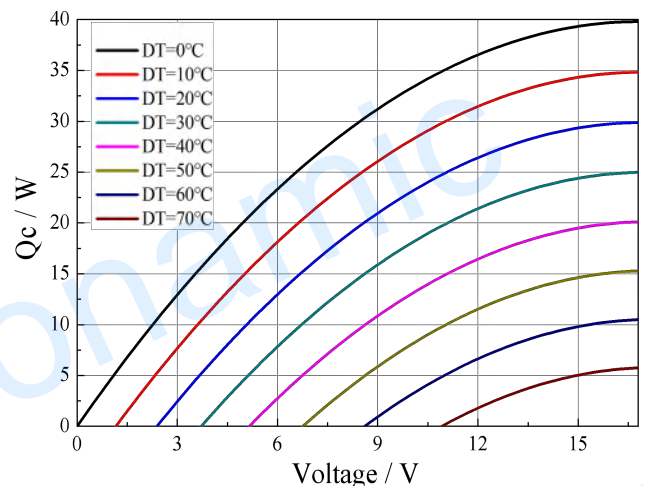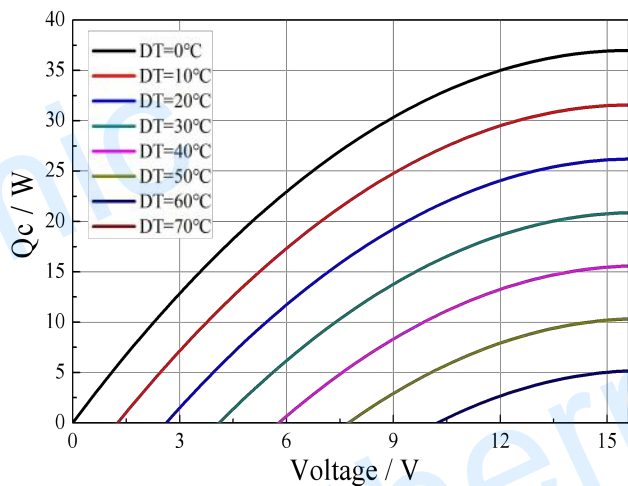


Standard Performance Graph  $Q_c = f(V)$


## Specification of Thermoelectric Module

TEC1-127035



### Performance Curves at $T_h=27^\circ\text{C}$

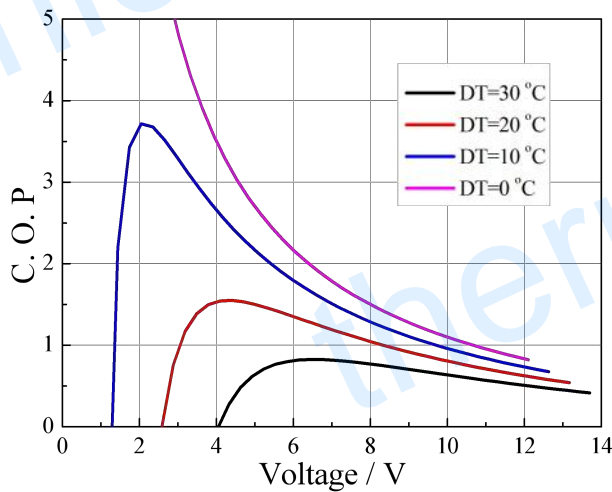

### Performance Curves at $T_h=50^\circ\text{C}$

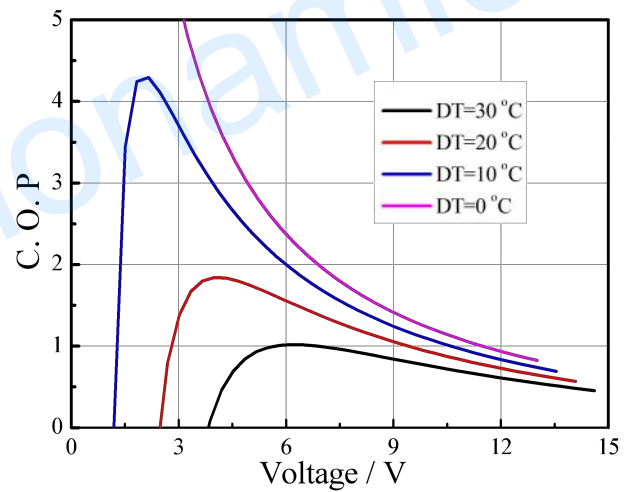

Standard Performance Graph  $\text{COP} = f(V)$  of DT ranged from 0 to 30 °C

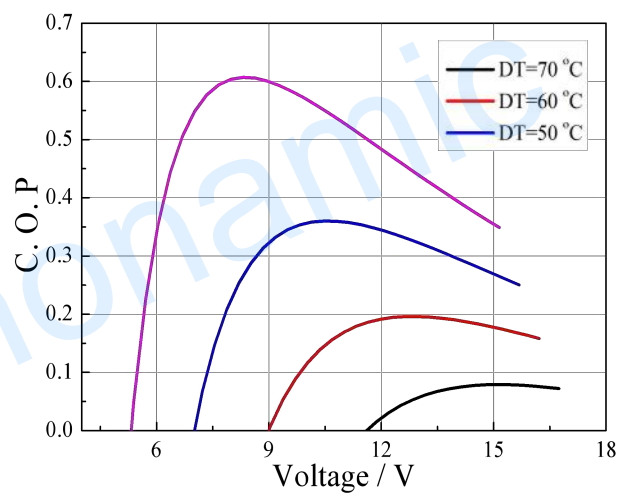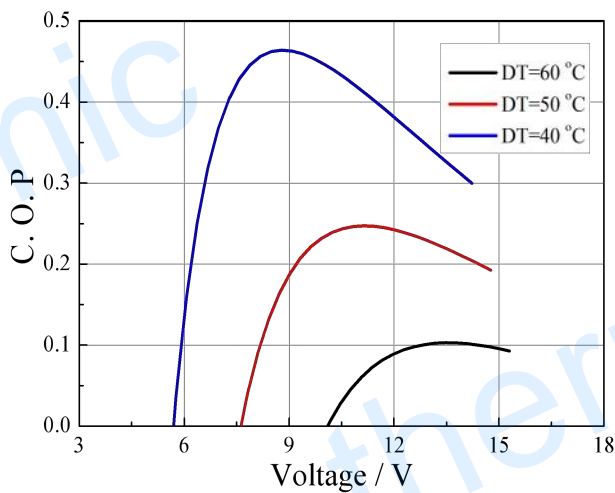

Standard Performance Graph  $\text{COP} = f(V)$  of DT ranged from 40 to 60/70 °C

**Remark:** The coefficient of performance (COP) is the cooling power  $Q_c$ /Input power ( $V \times I$ ).

### Operation Caution

- Attach the cold side of module to the object to be cooled
- Attach the hot side of module to a heat radiator for heat dissipating
- Operation below  $I_{\max}$  or  $V_{\max}$
- Work under DC

**Note:** All specifications subject to change without notice.