

# Specification of Thermoelectric Module

## TEC1-12714S

### Description

The 127 couples, 62mmx62mm size module is a single stage module which is designed for cooling and heating up to 100°C applications. If higher operation or processing temperature is required, please specify, we can design and manufacture the custom made module according to your special requirements.

### Features

- No moving parts, no noise, and solid-state
- Compact structure, small in size, light in weight
- Environmental friendly
- RoHS compliant
- Precise temperature control
- Exceptionally reliable in quality, high performance


### Application

- Food and beverage service refrigerator
- Portable cooler box for cars
- Liquid cooling
- Temperature stabilizer
- CPU cooler and scientific instrument
- Photonic and medical systems

### Performance Specification Sheet


Th(°C)	27	50	Hot side temperature at environment: dry air, N <sub>2</sub>
DT <sub>max</sub> (°C)	68	76	Temperature Difference between cold and hot side of the module when cooling capacity is zero at cold side
U <sub>max</sub> (Voltage)	14.8	16.6	Voltage applied to the module at DT <sub>max</sub>
I <sub>max</sub> (amps)	14.0	14.0	DC current through the modules at DT <sub>max</sub>
Q <sub>Cmax</sub> (Watts)	140.0	153.5	Cooling capacity at cold side of the module under DT=0°C
AC resistance(ohms)	0.8~0.95	0.88~1.05	The module resistance is tested under AC

### Geometric Characteristics Dimensions in millimeters

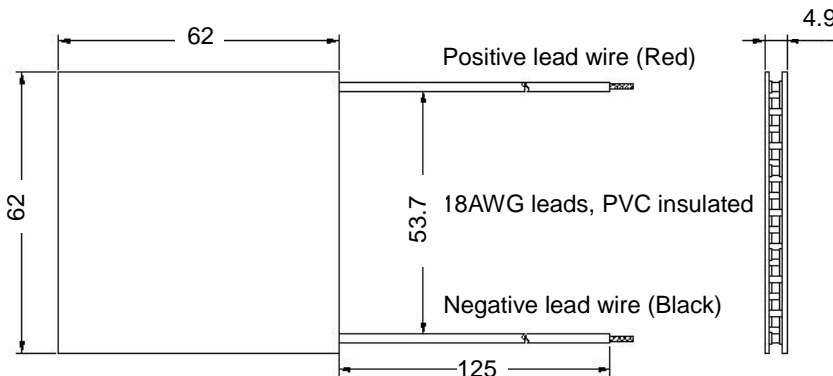

### Sealing Option

Suffix	Sealant
NS	No sealing
SS	Silicone sealant
EPS	Epoxy
OS	Customer specify sealing other than above

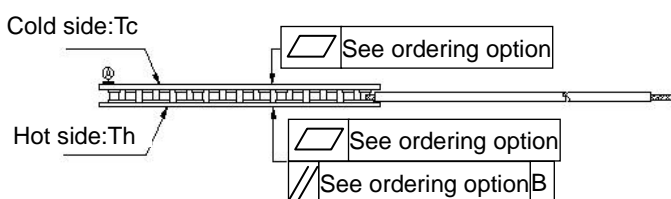

### Additional

Ceramic material: Alumina (Al<sub>2</sub>O<sub>3</sub>, white 96%)  
Solder tinning: Bismuth Tin (BiSn) M.P. 138°C

### Ordering Option

Suffix	Thickness (mm)	Flatness/Parallelism (mm)	Lead wire length(mm) Standard/Optional length
TF	0:4.9±0.1	0: 0.05/0.05	125±1/Specify
TF	1:4.9±0.05	1: 0.04/0.04	125±1/Specify
TF	2:4.9±0.03	2: 0.03/0.03	125±1/Specify

Eg. TF01: Thickness 4.9±0.1(mm) and Flatness 0.04/0.04(mm)


**Creative technology with fine manufacturing processes provides you the reliable and quality products.**

Tel: +86-791-88198288 Fax: +86-791-88198308 Email: [info@thermonamic.com](mailto:info@thermonamic.com) Web Site: [www.thermonamic.com](http://www.thermonamic.com)


# Specification of Thermoelectric Module

## TEC1-12714S


### Performance Curves at $T_h=27^\circ\text{C}$

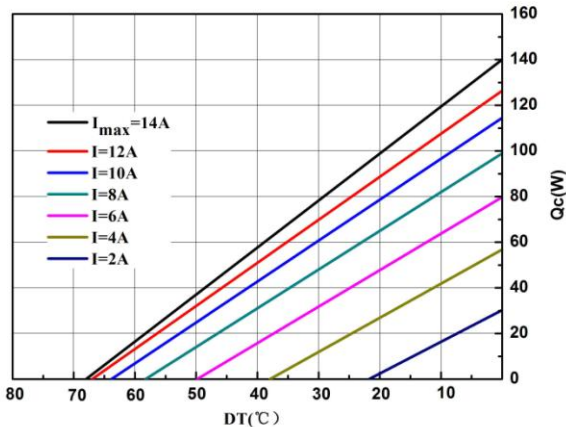

The chart for  $Q_c$  Vs  $DT$  under various currents

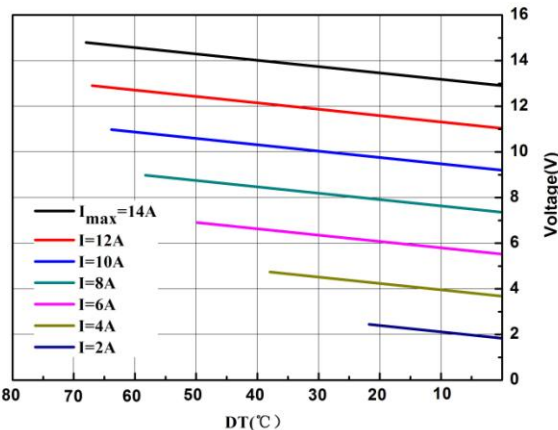


The chart for Voltage Vs  $DT$  under various currents

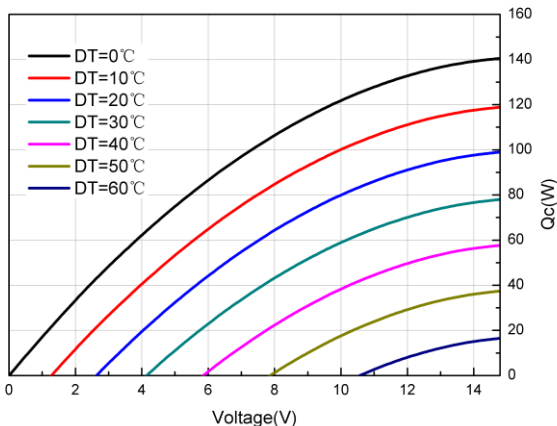


The chart for  $Q_c$  Vs Voltage(V) under various  $DT$


### Performance Curves at $T_h=50^\circ\text{C}$

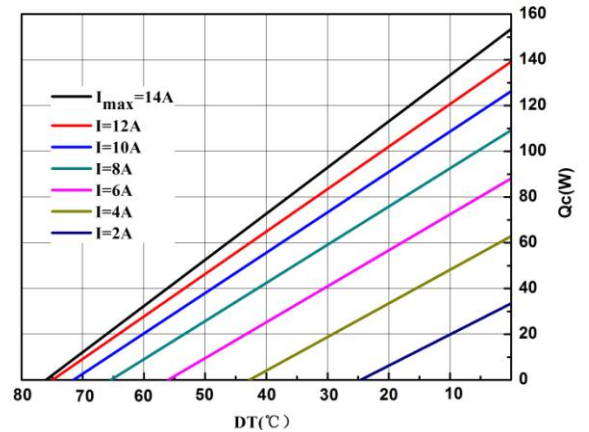

The chart for  $Q_c$  Vs  $DT$  under various currents

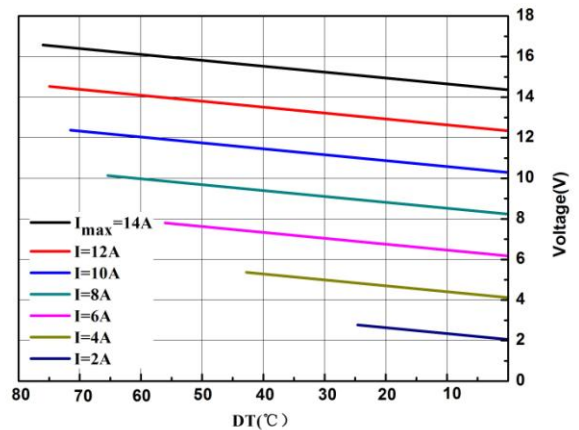

The chart for Voltage Vs  $DT$  under various currents

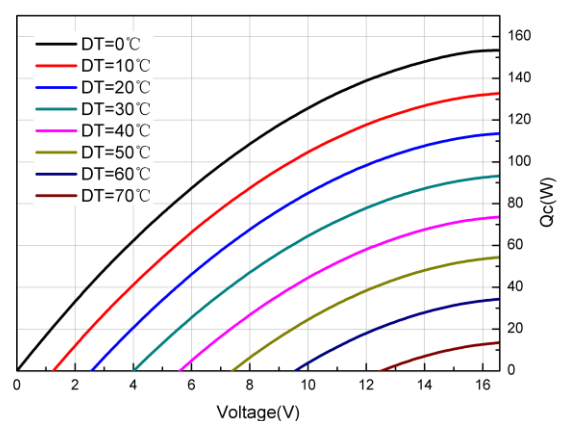

The chart for  $Q_c$  Vs Voltage under various  $DT$

### Operation Cautions

- Cold side of the module stucked on the object being cooled
- Hot side of the module mounted on a heat radiator
- Work under DC
- Operation below  $I_{max}$  or  $V_{max}$
- Operation or storage module below  $100^\circ\text{C}$

Creative technology with fine manufacturing processes provides you the reliable and quality products.

Tel: +86-791-88198288

Fax: +86-791-88198308

Email: [info@thermonamic.com](mailto:info@thermonamic.com)

Web Site: [www.thermonamic.com](http://www.thermonamic.com)