

Specification of Thermoelectric Module

TEC3-69-29-11-07T100

Description

The TEC3-69-29-11-07 is a multistage module designed for greater temperature differential cooling, good for cooling and heating up to 100 °C applications. It is a 69-29-11 couples module in size of 13mm×8.6mm (top)/28.3mm ×21.7mm (bottom). If higher operation or processing temperature is required, please specify, we can design and manufacture according to your special requirements.

Features

- High Temperature Differential
- No moving parts, no noise, and solid-state
- Compact structure, small in size, light in weight
- Environmental friendly
- RoHS compliant
- Precise temperature control
- Exceptionally reliable in quality, high performance


Application

- Infrared (IR) Sensors
- CCD Sensor
- Gas Analyzers
- Calibration Equipment
- CPU cooler and scientific instrument
- Photonic and medical systems
- Guidance Systems

Performance Specification Sheet

Th(°C)	27	50	Hot side temperature at environment: dry air, N ₂
DT _{max} (°C)	112	125	Temperature Difference between cold and hot side of the module when cooling capacity is zero at cold side
U _{max} (Voltage)	7.0	7.5	Voltage applied to the module at DT _{max}
I _{max} (Amps)	7.0	7.0	DC current through the modules at DT _{max}
Q _{Cmax} (Watts)	10.9	11.6	Cooling capacity at cold side of the module under DT=0 °C
AC resistance(Ohms)	1.00	1.07	The module resistance is tested under AC
Tolerance (%)	± 10		For thermal and electricity parameters

Geometric Characteristics Dimensions in millimeters

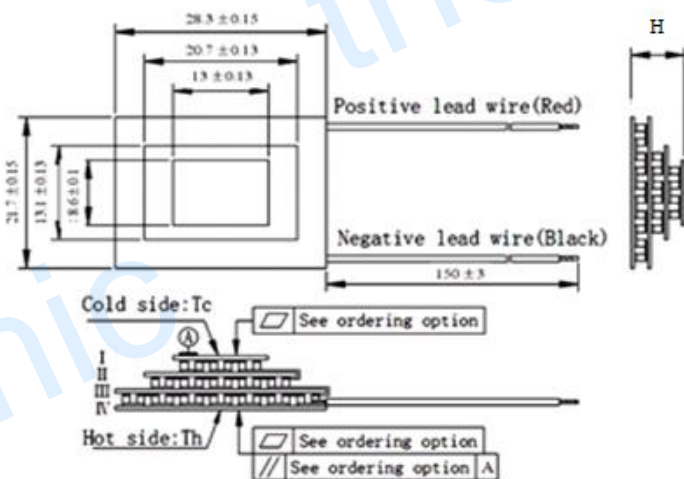

Manufacturing Options

A. Solder:

BiSn (T_{mel}=138°C)

B. Sealant:

No sealing

C. Ceramics:

Alumina (Al₂O₃, white 96%)

D. Ceramics Surface Options:

Blank ceramics

Ordering Option

Suffix	Thickness (mm)	Flatness/ Parallelism (mm)	Lead wire length(mm) Standard/Optional length
TF	0: 7.3 ± 0.3	0: 0.15/0.2	150±3/Specify

Creative technology with fine manufacturing processes provides you the reliable and quality products.



Tel: +86-791-88198288 Fax: +86-791-88198308 Email: sales@thermonamic.com.cn Web Site: www.thermonamic.com.cn

Specification of Thermoelectric Module



TEC3-69-29-11-07T100

Performance Curves at Th=27 °C



Performance Curves at Th=50 °C

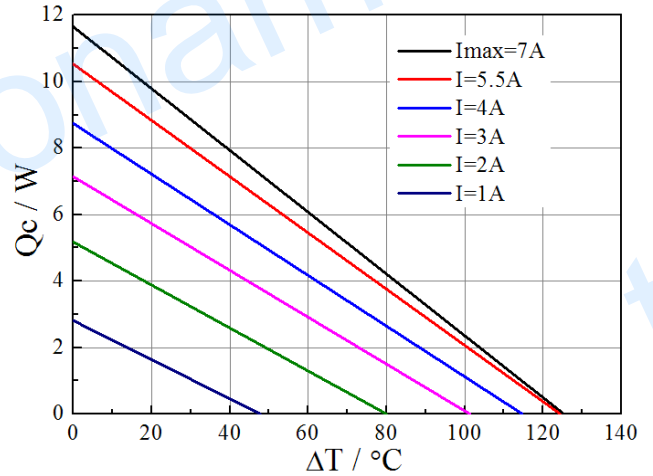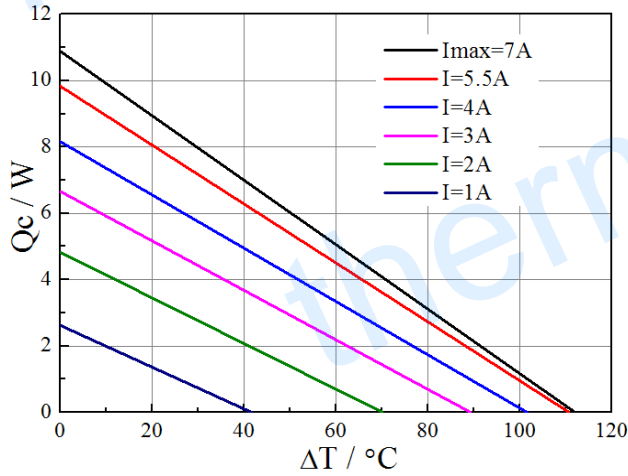

Standard Performance Graph $Q_c = f(\Delta T)$

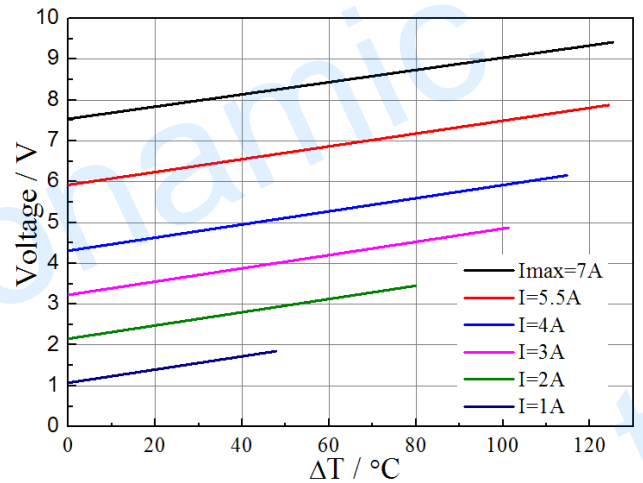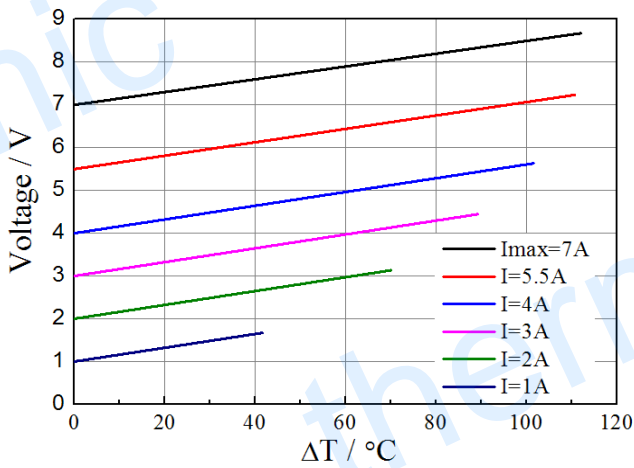

Standard Performance Graph $V = f(\Delta T)$

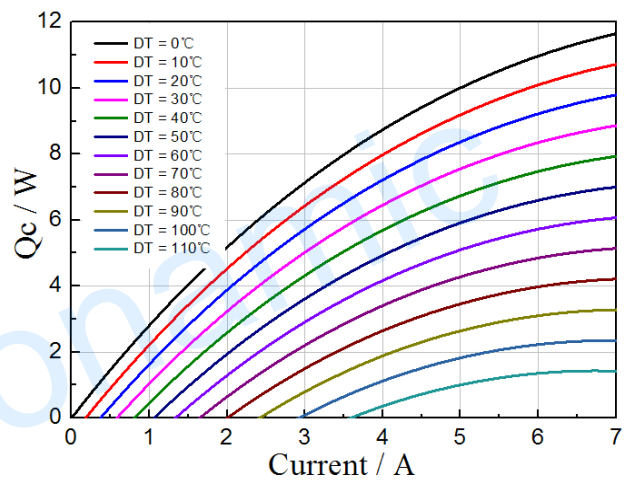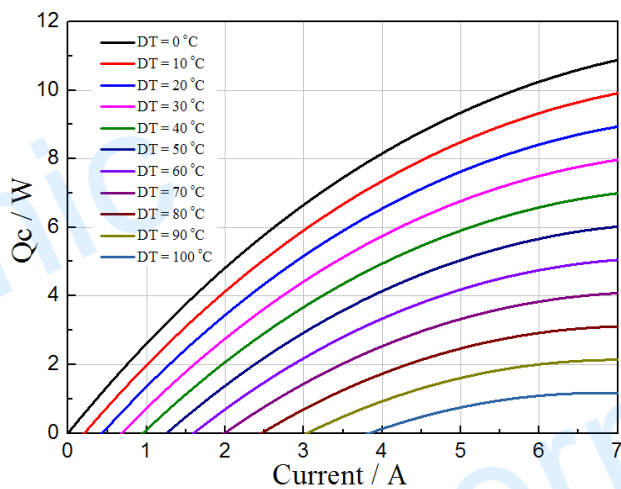


Standard Performance Graph $Q_c = f(I)$


Specification of Thermoelectric Module

TEC3-69-29-11-07T100



Performance Curves at Th=27 °C

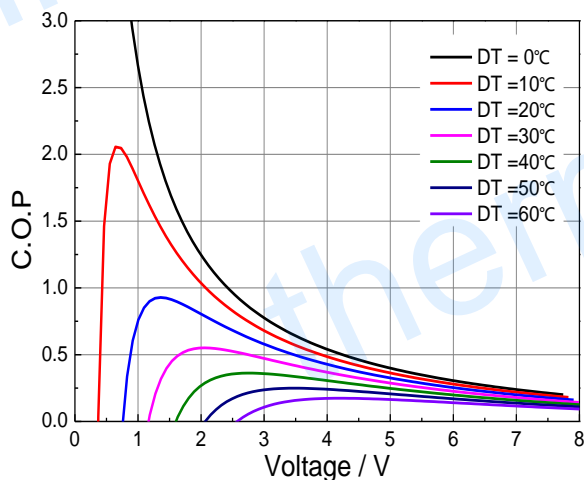

Performance Curves at Th=50 °C

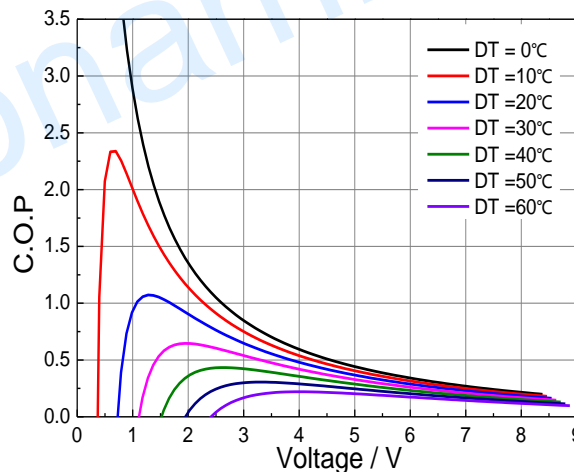

Standard Performance Graph COP = f(V) of DT ranged from 0 to 50 °C

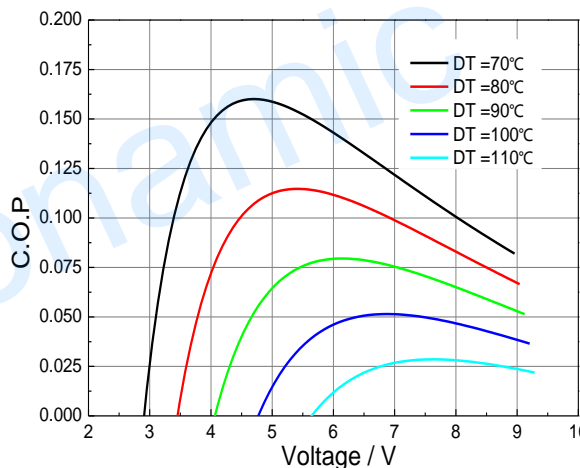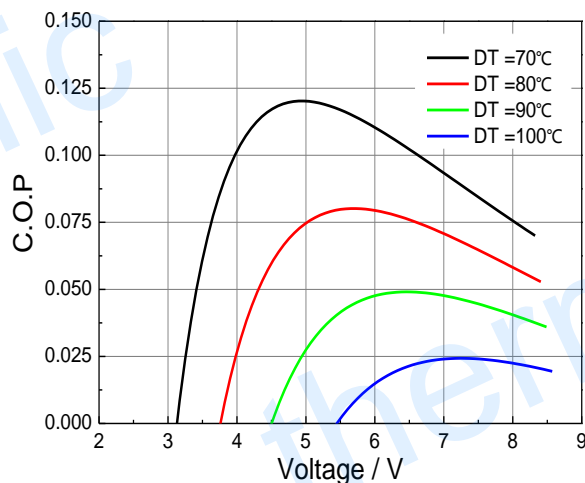

Standard Performance Graph COP = f(V) of DT ranged from 60 to 100/110 °C

Remark: The coefficient of performance (COP) is the cooling power Q_c /Input power ($V \times I$).

Operation Cautions

- Attach the cold side of module to the object to be cooled
- Attach the hot side of module to a heat radiator for heat dissipating
- Operation or storage module below 100 °C
- Operation below I_{max} or V_{max}
- Work under DC

Note: All specifications subject to change without notice.