

Specification of Thermoelectric Module

TEFC1-02412

Description

The 24 couples, 6 mm × 12mm size module which is made of selected high performance ingot to achieve superior cooling performance and greater delta T up to 70 °C, designed for superior cooling and heating applications. If higher operation or processing temperature is required, please specify, we can design and manufacture the custom made module according to your special requirements.

Features

- No moving parts, no noise, and solid-state
- Compact structure, small in size, light in weight
- Environmental friendly
- RoHS compliant
- Precise temperature control
- Exceptionally reliable in quality, high performance



Application

- Food and beverage service refrigerator
- Portable cooler box for cars
- Liquid cooling
- Temperature stabilizer
- CPU cooler and scientific instrument
- Photonic and medical systems

Performance Specification Sheet

Th (°C)	27	50	Hot side temperature at environment: dry air, N ₂
DT _{max} (°C)	70	79	Temperature Difference between cold and hot side of the module when cooling capacity is zero at cold side
U _{max} (Voltage)	2.98	3.22	Voltage applied to the module at DT _{max}
I _{max} (amps)	1.2	1.2	DC current through the modules at DT _{max}
Q _{Cmax} (Watts)	2.30	2.48	Cooling capacity at cold side of the module under DT=0 °C
AC resistance (ohms)	1.90	2.05	The module resistance is tested under AC
Tolerance (%)	10%		For thermal and electricity parameters

Geometric Characteristics Dimensions in millimeters

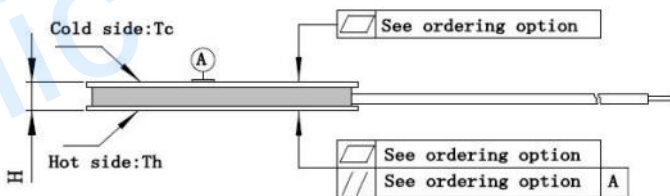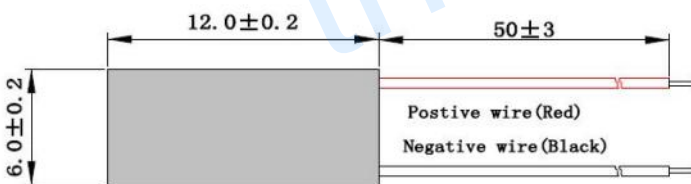

Ordering Option

Suffix	Thickness H (mm)	Flatness/Parallelism (mm)	Lead wire length(mm) Standard/Optional length
TF	0:1.6± 0.1	0: 0.05/0.05	50± 3/Specify

Manufacturing Options

A. Solder:

1. T240: SbSn (T_{melt}=240°C)
2. T280: AuSn (T_{melt}=280°C)

B. Sealant:

NS: No sealing

C. Ceramics:


AlN : Aluminum Nitride

D. Ceramics Surface Options:

Hot side: Metalized (Au plating)
Cold side: Metalized (Au plating)

Naming for the Module

TEFC1- 02412 - X - X - X - X



TEFC1- 02412 - TTAu - T240 - TF00 - AlN

Creative technology with fine manufacturing processes provides you the reliable and quality products



Tel: +86-791-88198288 Fax: +86-791-88198308 Email: sales@thermonamic.com.cn Web Site: www.thermonamic.com.cn

Specification of Thermoelectric Module



TEFC1-02412

Performance Curves at Th=27 °C



Performance Curves at Th=50 °C

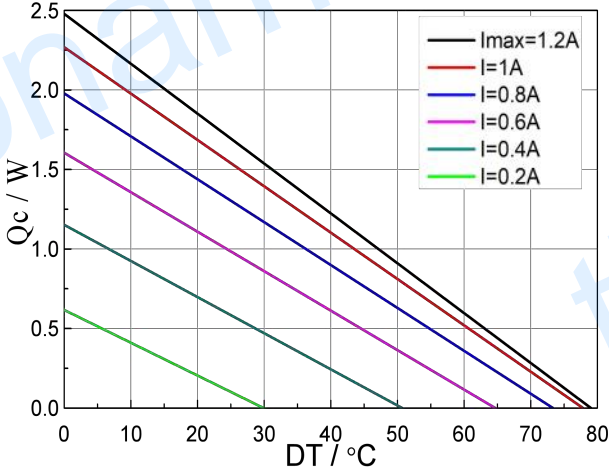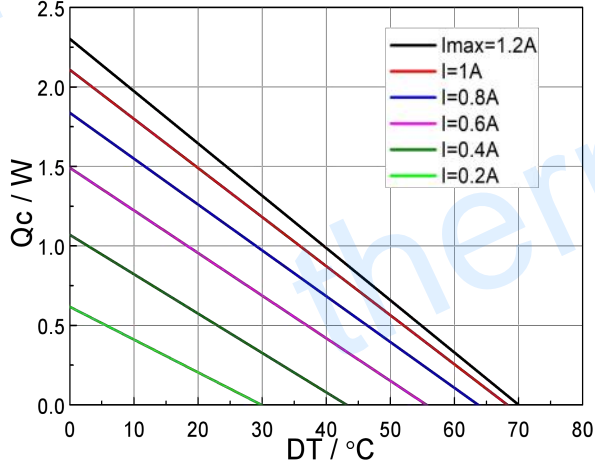

Standard Performance Graph $Q_c = f(DT)$

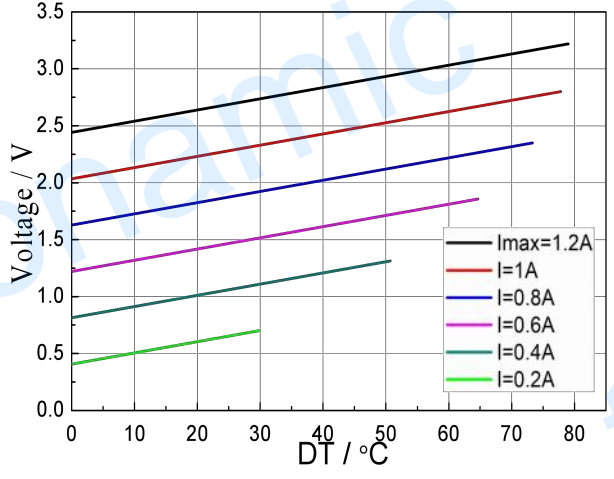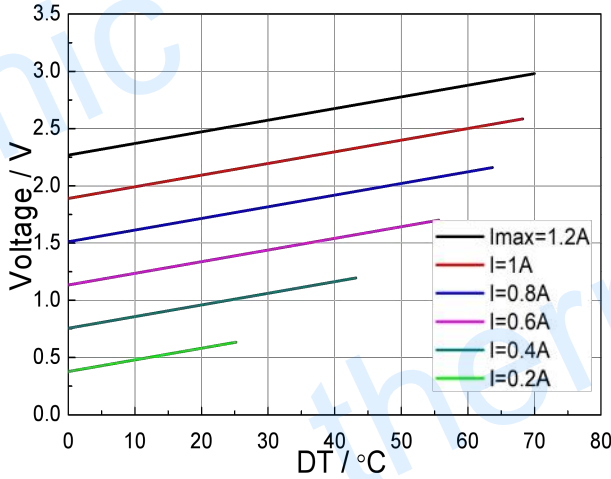

Standard Performance Graph $V = f(\Delta T)$

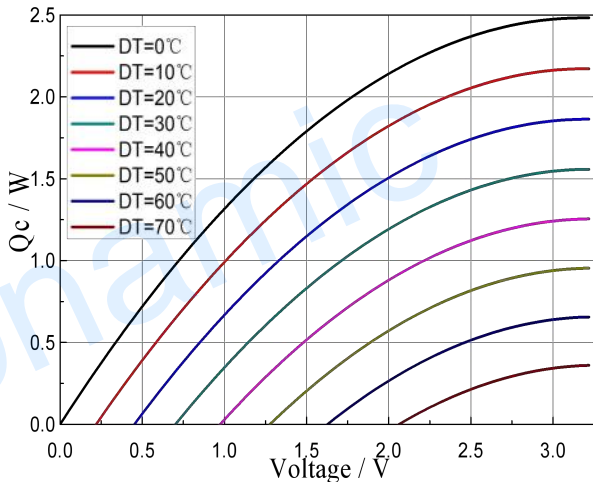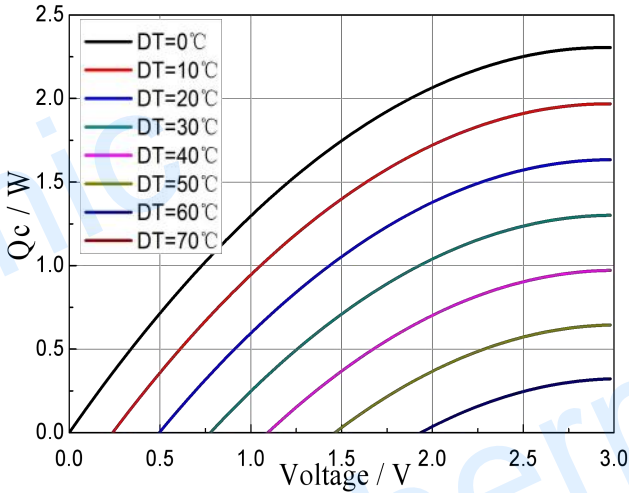


Standard Performance Graph $Q_c = f(V)$


Specification of Thermoelectric Module

TEFC1-02412



Performance Curves at $T_h=27\text{ }^\circ\text{C}$

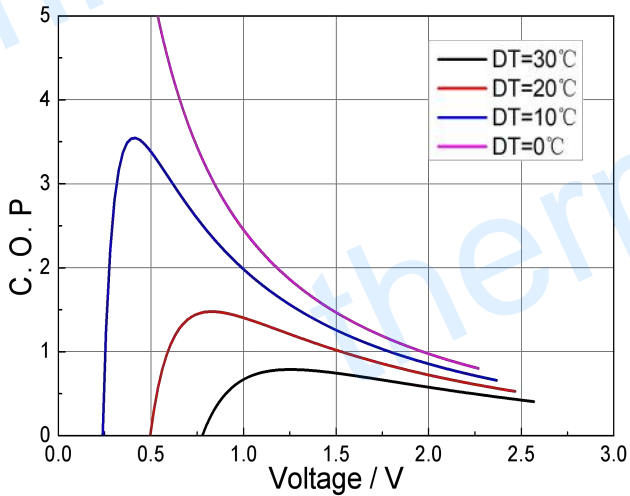

Performance Curves at $T_h=50\text{ }^\circ\text{C}$

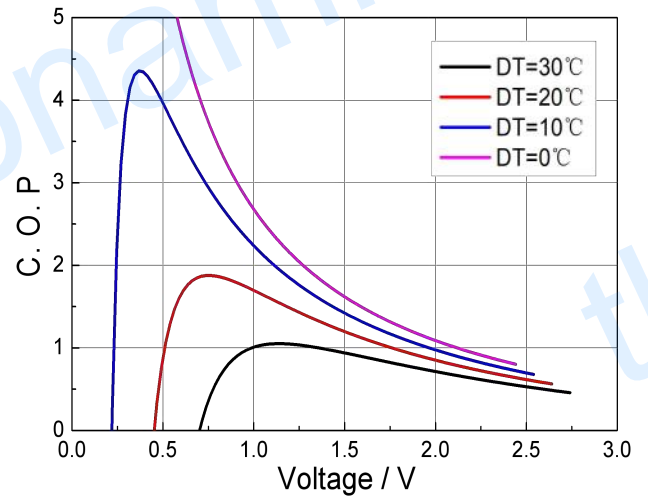

Standard Performance Graph COP = f(V) of ΔT ranged from 0 to $30\text{ }^\circ\text{C}$

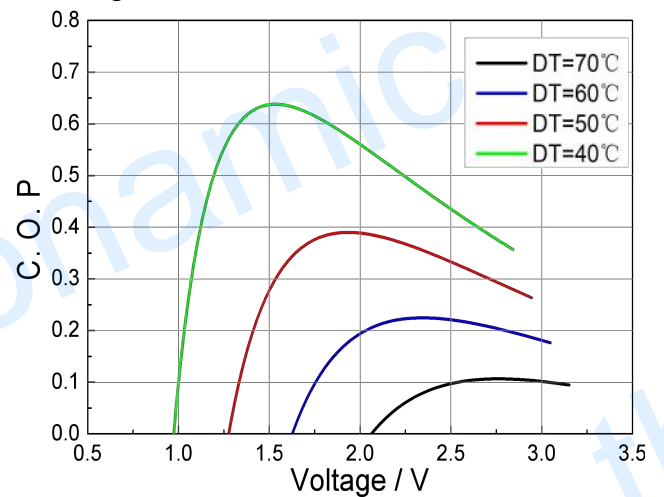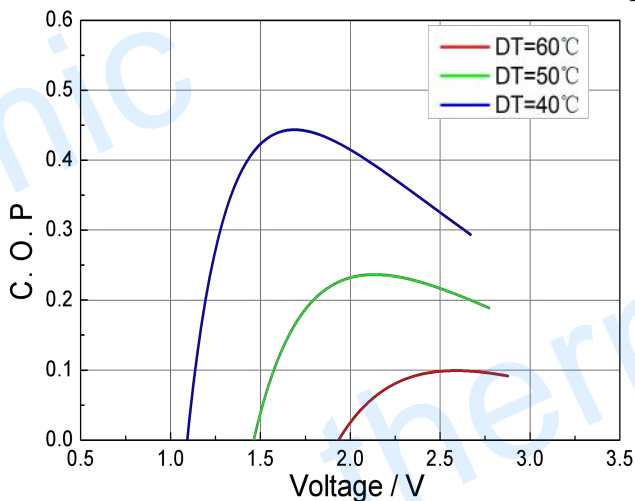

Standard Performance Graph COP = f(V) of ΔT ranged from 40 to 60/70 $^\circ\text{C}$

Remark: The coefficient of performance (COP) is the cooling power Q_c /Input power ($V \times I$).

Operation Cautions

- Attach the cold side of module to the object to be cooled
- Attach the hot side of module to a heat radiator for heat dissipating
- Operation or storage module below $100\text{ }^\circ\text{C}$
- Operation below I_{\max} or V_{\max}
- Work under DC