

# Specification of Thermoelectric Module

**TES1-03112**

## Description

The 31 couples, 12mmx12mm size module is a single stage module which is made of our high performance ingot to achieve superior cooling performance and 70°C or larger delta Tmax, is designed for superior cooling and heating applications. Beyond the standard below, we can design and manufacture the custom made module according to your special requirements.

## Features

- No moving parts, no noise, and solid-state
- Compact structure, small in size, light in weight
- Environmental friendly
- RoHS compliant
- Precise temperature control
- Exceptionally reliable in quality, high performance


## Application

- Food and beverage service refrigerator
- Portable cooler box for cars
- Liquid cooling
- Temperature stabilizer
- CPU cooler and scientific instrument
- Photonic and medical systems

## Performance Specification Sheet

Th (°C)	27	50	Hot side temperature at environment: dry air, N <sub>2</sub>
DT <sub>max</sub> (°C)	70	79	Temperature Difference between cold and hot side of the module when cooling capacity is zero at cold side
U <sub>max</sub> (Voltage)	3.94	4.26	Voltage applied to the module at DT <sub>max</sub>
I <sub>max</sub> (Amps)	1.4	1.4	DC current through the modules at DT <sub>max</sub>
Q <sub>Cmax</sub> (Watts)	3.4	3.66	Cooling capacity at cold side of the module under DT=0 °C
AC resistance (Ohms)	2.15	2.32	The module resistance is tested under AC
Tolerance (%)	± 10		For thermal and electricity parameters

## Geometric Characteristics Dimensions in millimeters

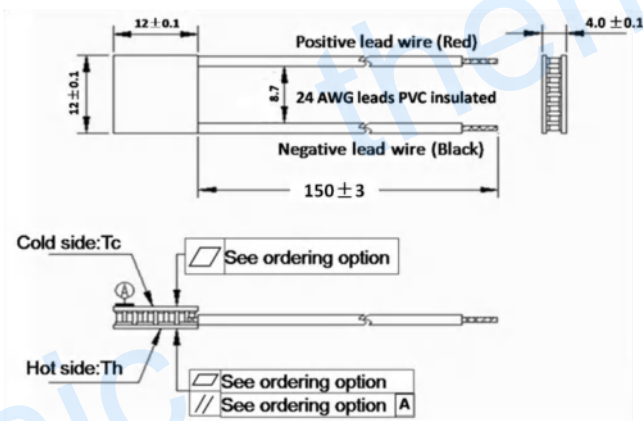

## Manufacturing Options

### A. Solder:

1. T100: BiSn (Tmelt=138°C)
2. T200: CuAgSn (Tmelt = 217°C)
3. T240: SbSn (Tmelt = 240°C)

### B. Sealant:

1. NS: No sealing (Standard)
2. SS: Silicone sealant
3. EPS: Epoxy sealant

### C. Ceramics:

1. Alumina (Al<sub>2</sub>O<sub>3</sub>, white 96%)
2. Aluminum Nitride (AlN)

### D. Ceramics Surface Options:

1. Blank ceramics (not metalized)
2. Metalized


## Ordering Option

Suffix	Thickness H (mm)	Flatness/ Parallelism (mm)	Lead wire length(mm) Standard/Optional length
TF	0:4.0± 0.1	0: 0.05/0.05	150±3/Specify
TF	1:4.0 ± 0.03	1: 0.02 /0.02	150±3/Specify

Eg. TF01: Thickness 4.0± 0.1 (mm) and Flatness 0.02 /0.02 (mm)

## Naming for the Module

TES1-03112- X-X - X - X

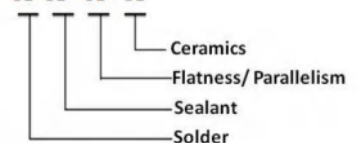

TES1-03112-T100-NS-TF01-AIO

T100: BiSn (Tmelt=138°C)


NS: No sealing

AIO: Alumina, white 96%


# Specification of Thermoelectric Module

**TES1-03112**



**Performance Curves at Th=27 °C**

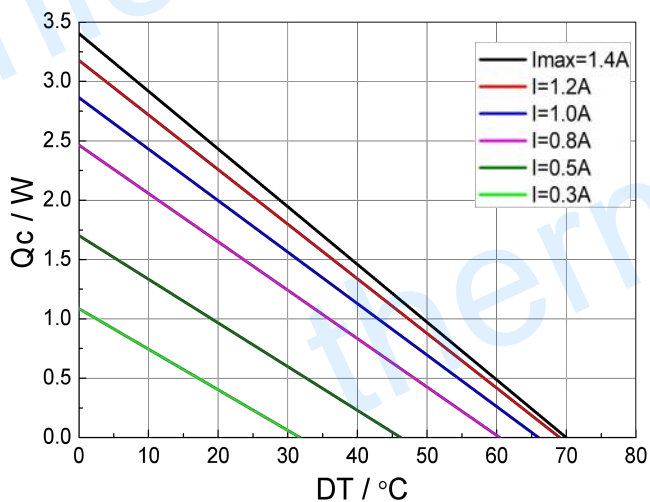



**Performance Curves at Th=50 °C**

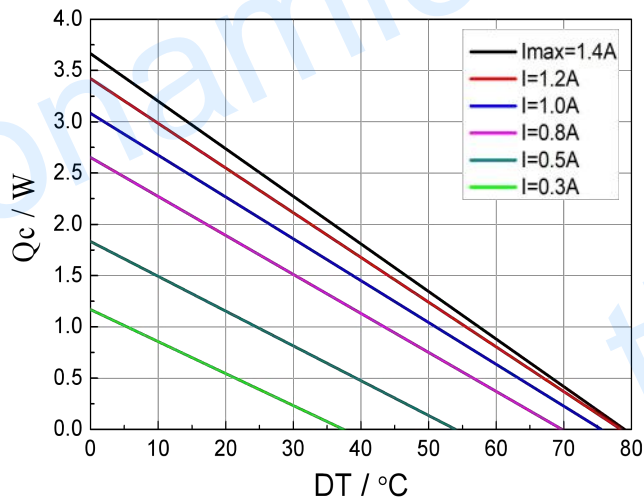

Standard Performance Graph  $Q_c = f(DT)$

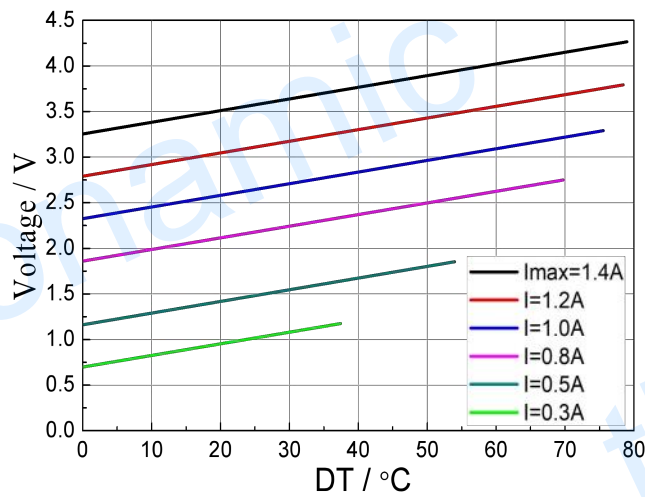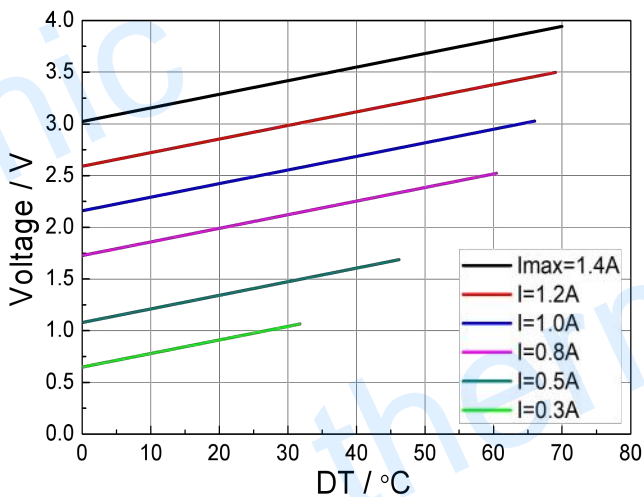

Standard Performance Graph  $V = f(DT)$

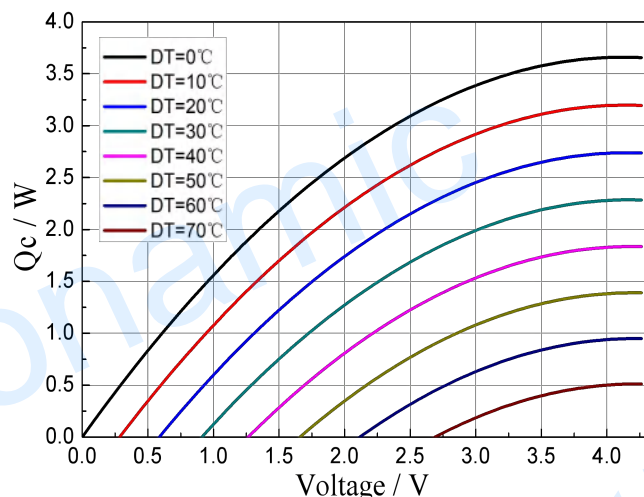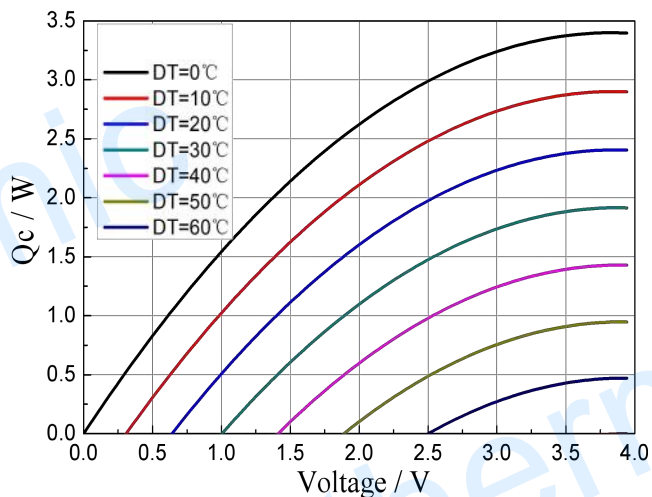


Standard Performance Graph  $Q_c = f(V)$


## Specification of Thermoelectric Module

TES1-03112



Performance Curves at Th=27 °C

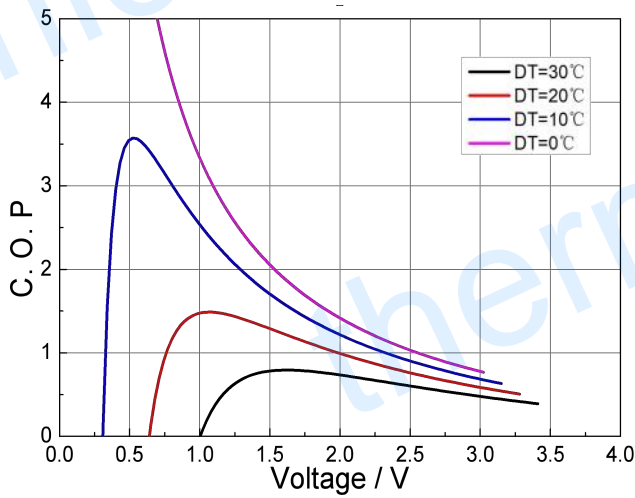

Performance Curves at Th=50 °C

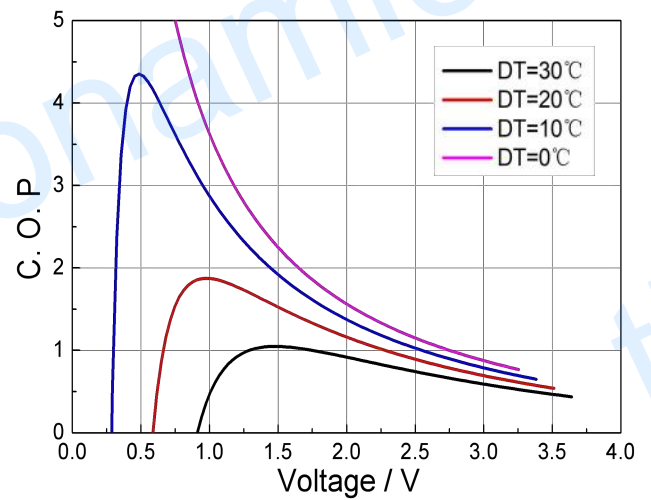

Standard Performance Graph COP = f(V) of DT ranged from 0 to 30 °C

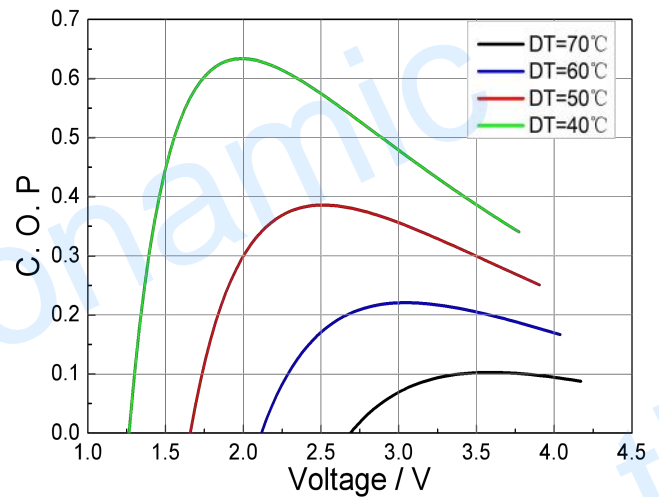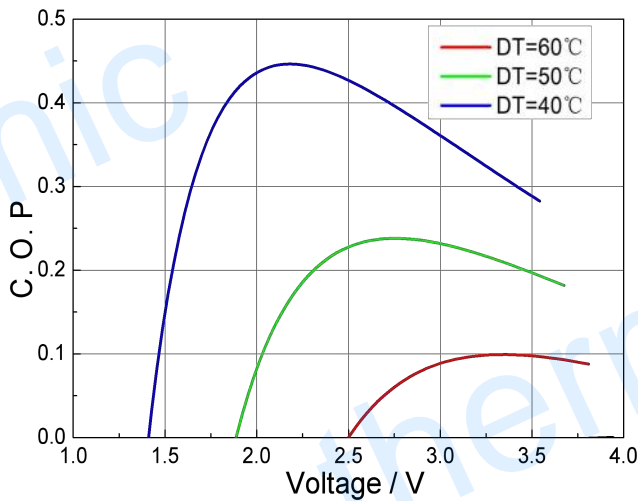

Standard Performance Graph COP = f(V) of DT ranged from 40 to 60/70 °C

**Remark:** The coefficient of performance (COP) is the cooling power  $Q_c$ /Input power ( $V \times I$ ).

### Operation Caution

- Attach the cold side of module to the object to be cooled
- Attach the hot side of module to a heat radiator for heat dissipating
- Operation below  $I_{max}$  or  $V_{max}$
- Work under DC

**Note:** All specifications subject to change without notice.