

# Specification of Thermoelectric Module

## TES1-08850L1

### Description

The 88 couples, 8mm × 84/100mm size module is a single stage module which is made of our high performance ingot to achieve superior cooling performance and 72 °C or larger delta Tmax, is designed for superior cooling and heating applications. Beyond the standard below, we can design and manufacture the custom made module according to your special requirements.

### Features

- No moving parts, no noise, and solid-state
- Compact structure, small in size, light in weight
- Environmental friendly
- RoHS compliant
- Precise temperature control
- Exceptionally reliable in quality, high performance


### Application

- Food and beverage service refrigerator
- Portable cooler box for cars
- Liquid cooling
- Temperature stabilizer
- CPU cooler and scientific instrument
- Photonic and medical systems

### Performance Specification Sheet

Th (°C)	27	50	Hot side temperature at environment: dry air, N <sub>2</sub>
DT <sub>max</sub> (°C)	72	81	Temperature Difference between cold and hot side of the module when cooling capacity is zero at cold side
U <sub>max</sub> (Voltage)	11.1	12.0	Voltage applied to the module at DT <sub>max</sub>
I <sub>max</sub> (Amps)	5.0	5.0	DC current through the modules at DT <sub>max</sub>
Q <sub>Cmax</sub> (Watts)	35.9	38.6	Cooling capacity at cold side of the module under DT=0 °C
AC resistance (Ohms)	1.68	1.81	The module resistance is tested under AC
Tolerance (%)	± 10		For thermal and electricity parameters

### Geometric Characteristics Dimensions in millimeters

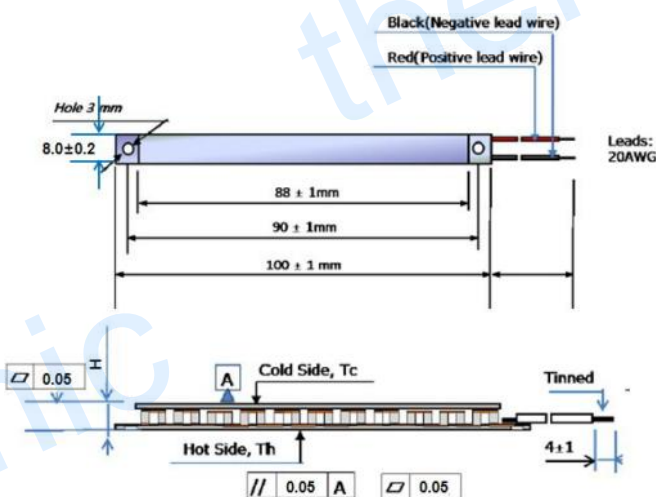

### Manufacturing Options

#### A. Solder:

1. T100: BiSn (T<sub>melt</sub> = 138 °C)
2. T200: CuSn (T<sub>melt</sub> = 227 °C)

#### B. Sealant:

1. NS: Silicone sealant

#### C. Ceramics:

1. Alumina (Al<sub>2</sub>O<sub>3</sub>, white 96%)

#### D. Ceramics Surface Options:

1. Blank ceramics (not metallized)

#### E. Pellet Surface Options:

1. AC: Anti-oxidation Coating


### Ordering Option

Suffix	Thickness H (mm)	Flatness/ Parallelism (mm) Parallelism (mm)	Lead wire length(mm) Standard/ Optional length
TF	0: 4.0 ± 0.1	0: 0.05/0.05	150±3/Specify


# Specification of Thermoelectric Module

**TES1-08850L1**



**Performance Curves at Th=27 °C**

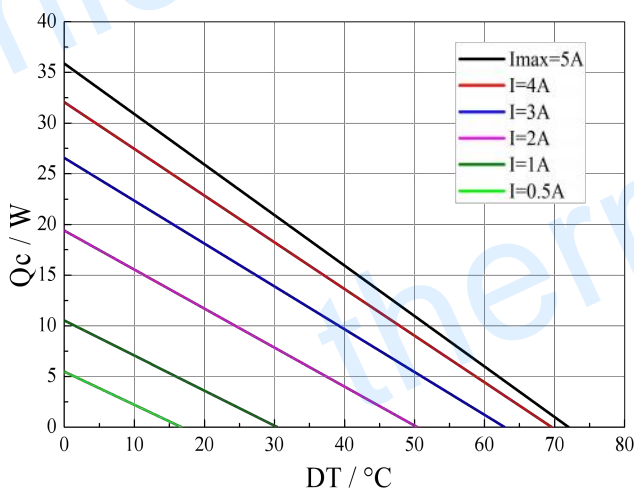



**Performance Curves at Th=50 °C**

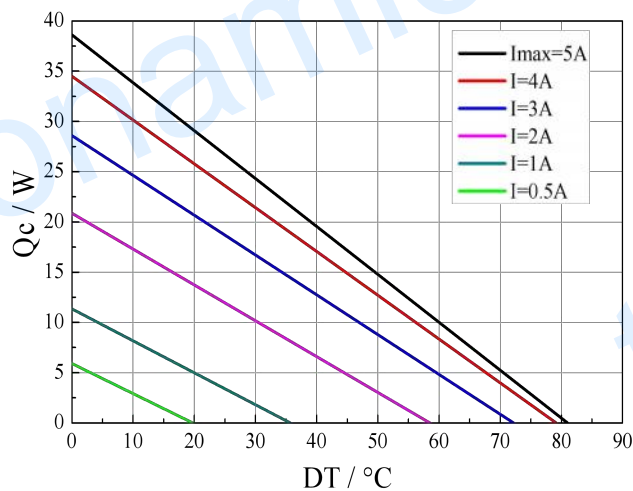

Standard Performance Graph  $Q_c = f(DT)$

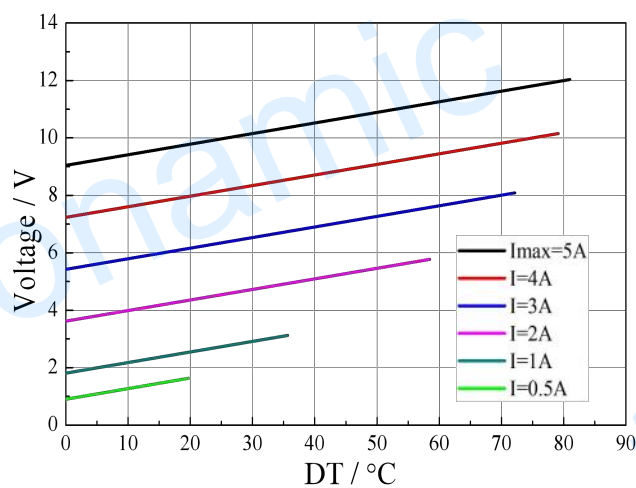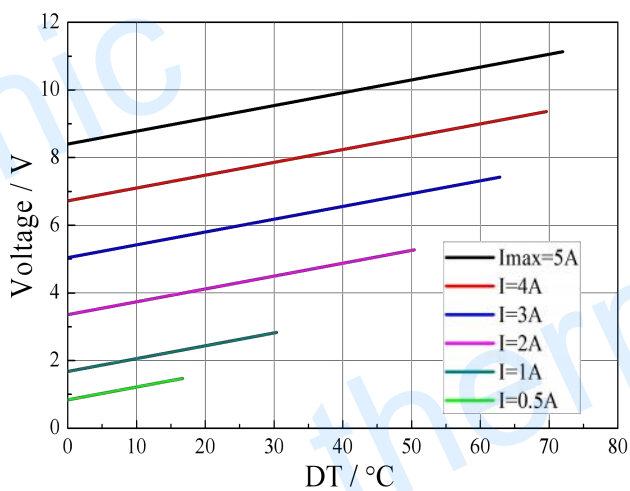

Standard Performance Graph  $V = f(DT)$

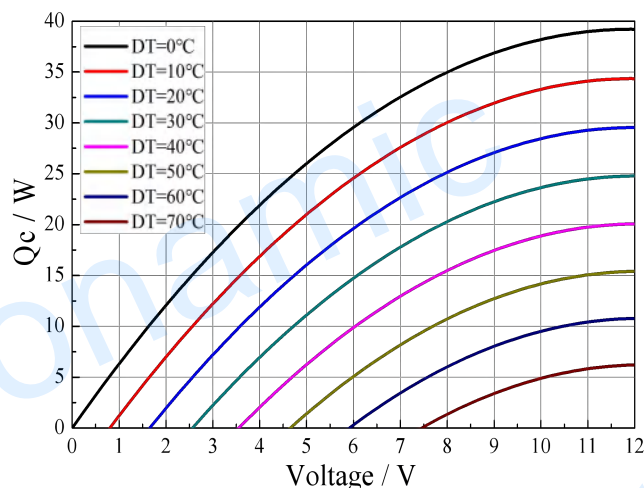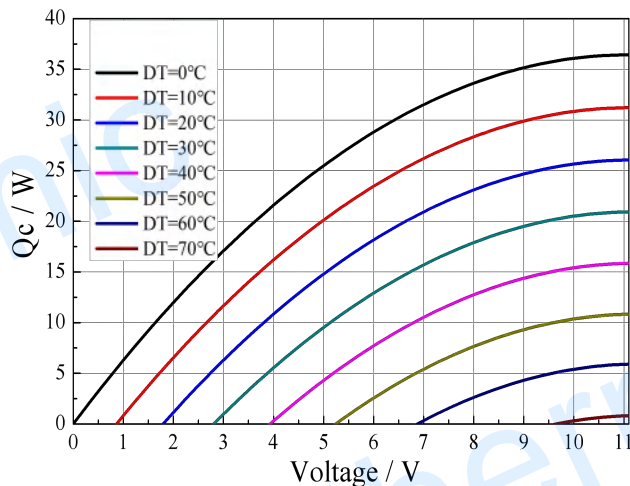


Standard Performance Graph  $Q_c = f(V)$


# Specification of Thermoelectric Module

## TES1-08850L1



### Performance Curves at Th=27 °C

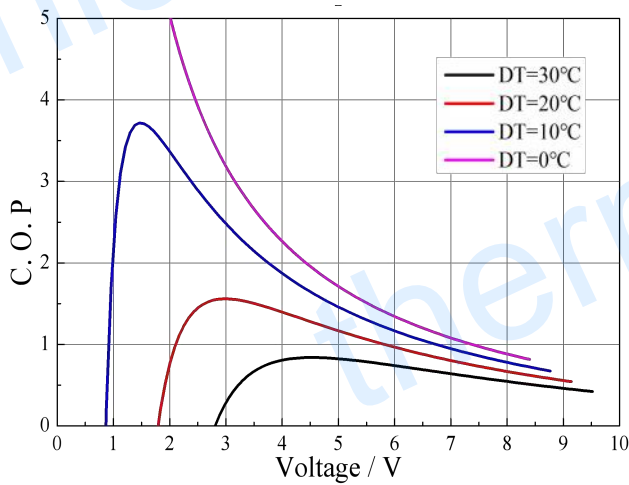

### Performance Curves at Th=50 °C

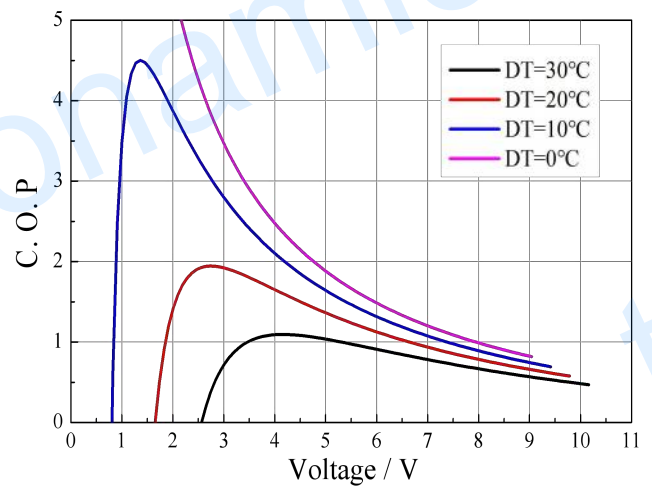

Standard Performance Graph COP = f(V) of DT ranged from 0 to 30 °C

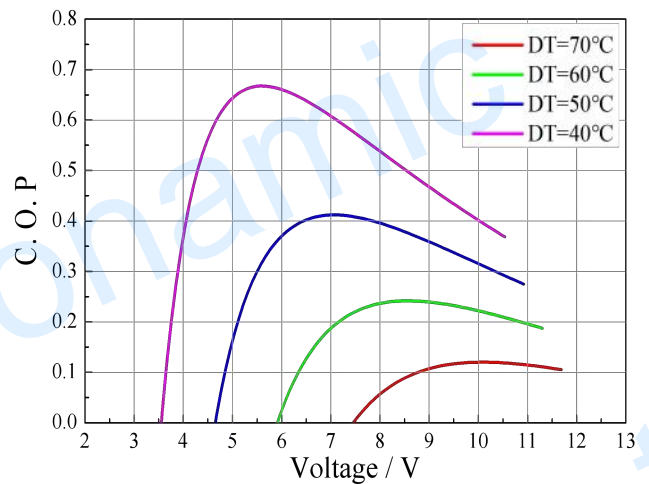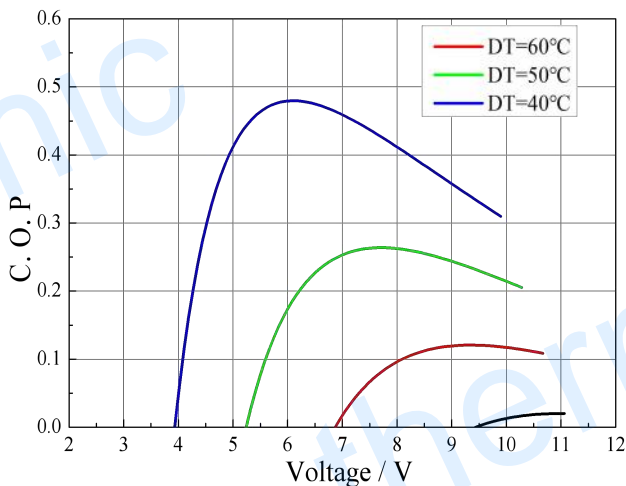

Standard Performance Graph COP = f(V) of DT ranged from 40 to 60/70 °C

**Remark:** The coefficient of performance (COP) is the cooling power  $Q_c$ /Input power ( $V \times I$ ).

### Operation Caution

- Attach the cold side of module to the object to be cooled
- Attach the hot side of module to a heat radiator for heat dissipating
- Operation below  $I_{max}$  or  $V_{max}$
- Work under DC

**Note:** All specifications subject to change without notice.