

Specification of Thermoelectric Module

TES1-12723-T100-SS-TF22-AIO

Description

The 127 couples, 30mm x 30mm size module is a single stage module which is made of our high performance ingot to achieve superior cooling performance and 70°C or larger delta Tmax, is designed for superior cooling and heating applications. Beyond the standard below, we can design and manufacture the custom made module according to your special requirements.

Features

- No moving parts, no noise, and solid-state
- Compact structure, small in size, light in weight
- Environmental friendly
- RoHS compliant
- Precise temperature control
- Exceptionally reliable in quality, high performance


Application

- Food and beverage service refrigerator
- Portable cooler box for cars
- Liquid cooling
- Temperature stabilizer
- CPU cooler and scientific instrument
- Photonic and medical systems

Performance Specification Sheet

Th (°C)	27	50	Hot side temperature at environment: dry air, N ₂
DT _{max} (°C)	70	79	Temperature Difference between cold and hot side of the module when cooling capacity is zero at cold side
U _{max} (Voltage)	15.9	17.2	Voltage applied to the module at DT _{max}
I _{max} (Amps)	2.51	2.51	DC current through the modules at DT _{max}
Q _{Cmax} (Watts)	25.3	27.2	Cooling capacity at cold side of the module under DT=0 °C
AC resistance (Ohms)	4.84	5.21	The module resistance is tested under AC
Tolerance (%)	10%		For thermal and electricity parameters

Geometric Characteristics Dimensions in millimeters

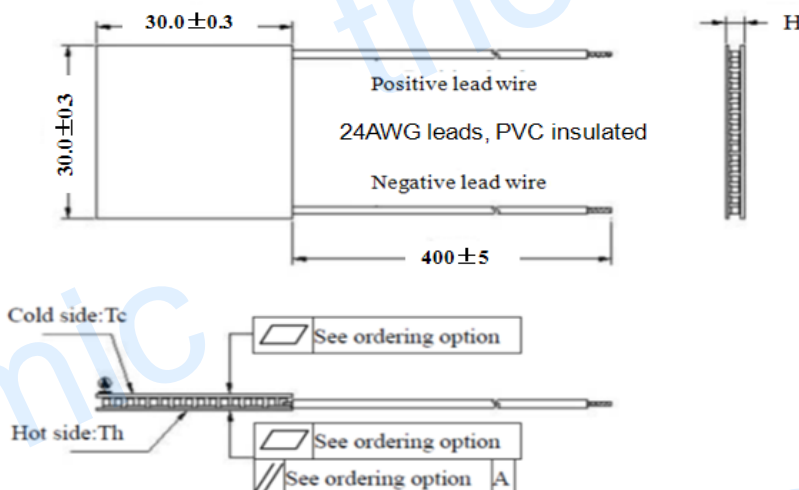

Manufacturing Options

A. Solder:

T100: BiSn (Tmelt=138°C)

B. Sealant:

SS: Silicone sealant

C. Ceramics:

AIO: Alumina (Al₂O₃, white 96%)

D. Ceramics Surface Options:

Blank ceramics (not metallized)

Ordering Option



Suffix	Thickness H (mm)	Flatness/ Parallelism (mm)	Lead wire length(mm) Standard/Optional length
TF	2:4.3± 0.05	2: 0.03/0.03	400±5/Specify

Specification of Thermoelectric Module



TES1-12723-T100-SS-TF22-AIO

Performance Curves at Th=27 °C



Performance Curves at Th=50 °C

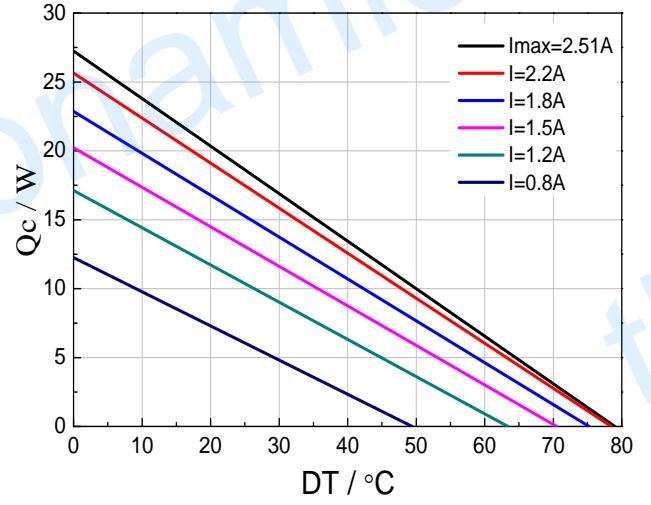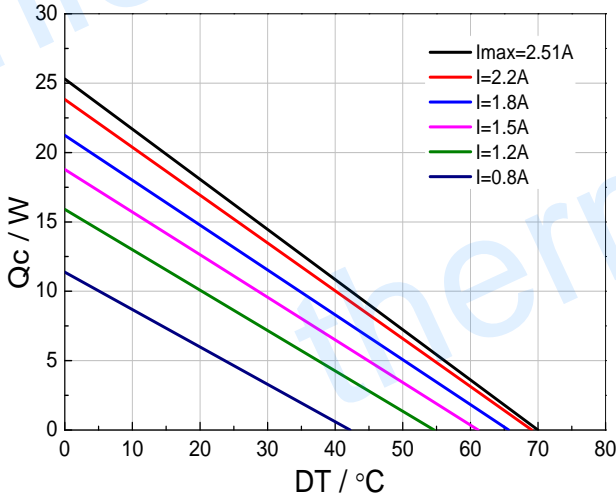

Standard Performance Graph $Q_c = f(DT)$

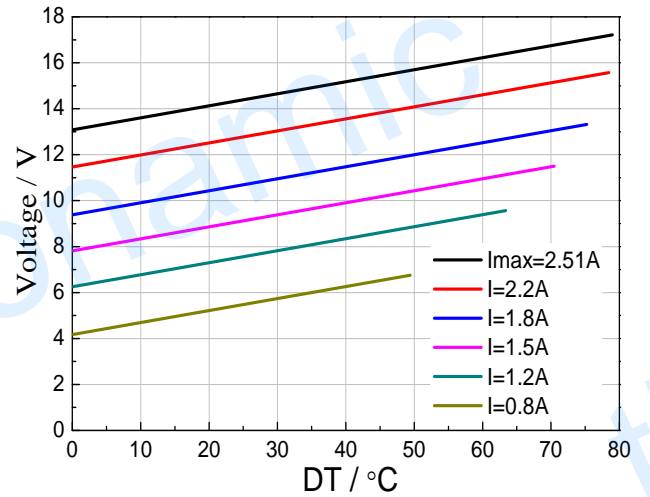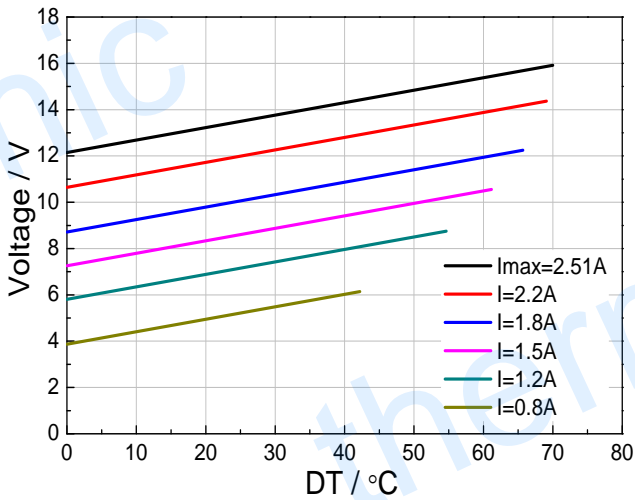

Standard Performance Graph $V = f(DT)$

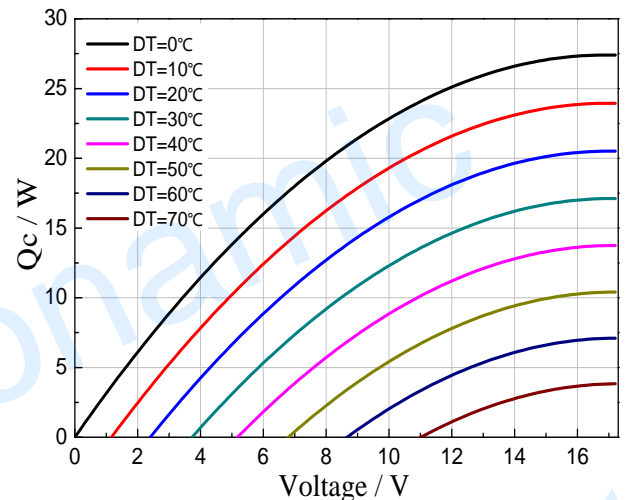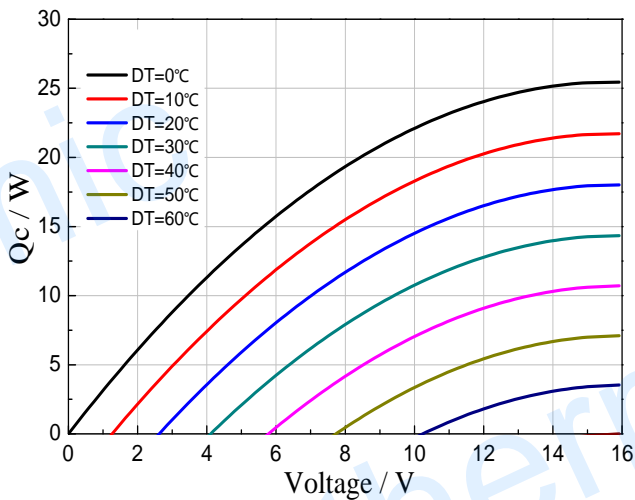


Standard Performance Graph $Q_c = f(V)$


Specification of Thermoelectric Module

TES1-12723-T100-SS-TF22-AIO



Performance Curves at Th=27 °C

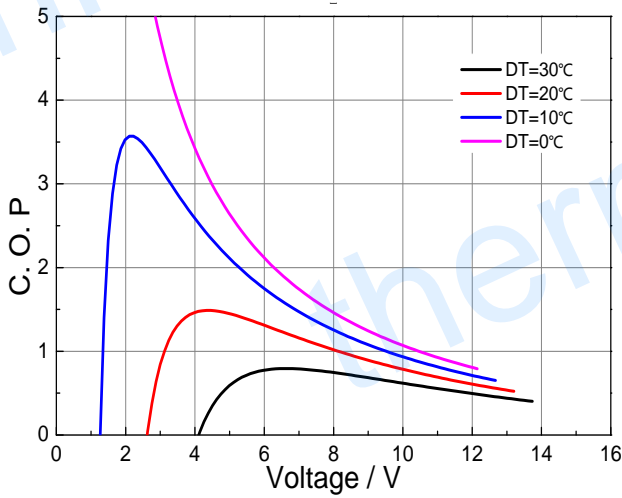

Performance Curves at Th=50 °C

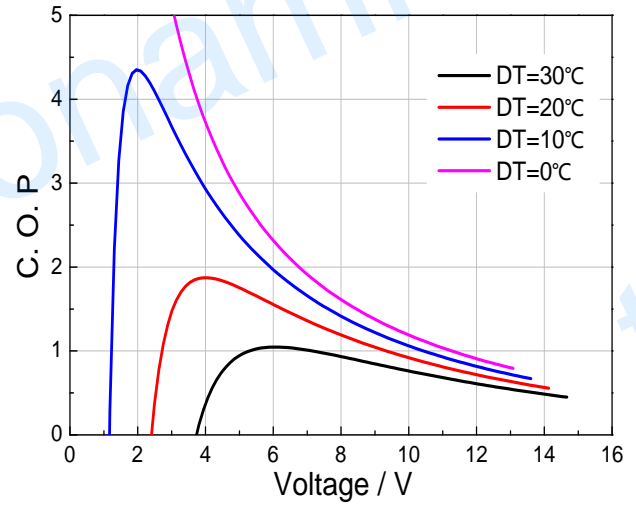

Standard Performance Graph COP = f(V) of DT ranged from 0 to 30 °C

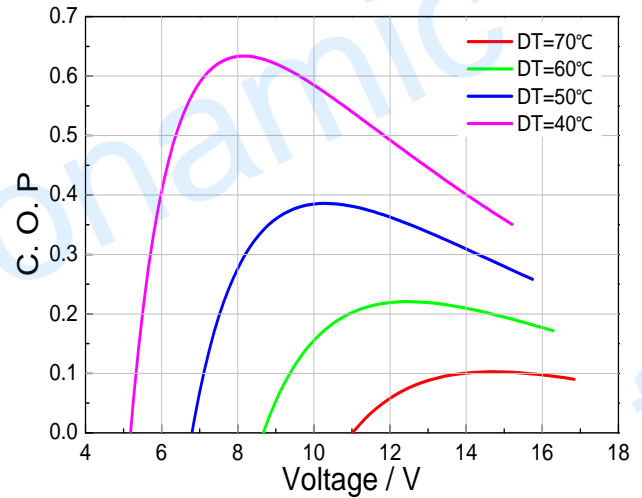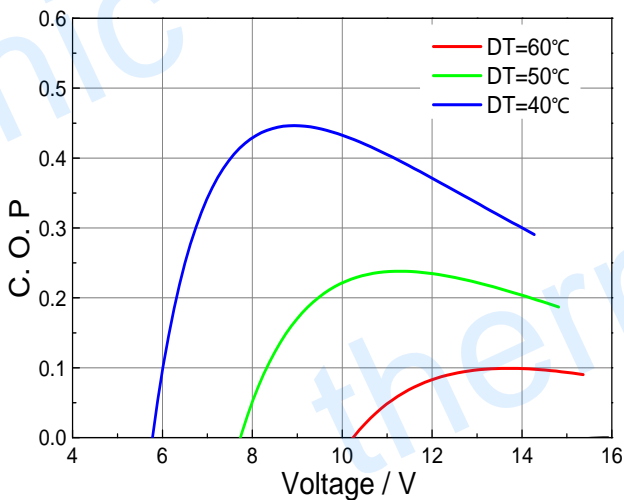

Standard Performance Graph COP = f(V) of DT ranged from 40 to 60/70 °C

Remark: The coefficient of performance (COP) is the cooling power Q_c /Input power ($V \times I$).

Operation Caution

- Cold side of the module stuck on the object being cooled
- Hot side of the module mounted on a heat radiator
- Operation below I_{max} or V_{max}
- Work under DC

Note: All specifications subject to change without notice.