

Specification of Thermoelectric Module

TEC1-24116T200

Description

The 241couples, 55mmx55mm size module is a single stage module which is designed for cooling and heating up to 180°C applications. If higher operation or processing temperature is required, please specify, we can design and manufacture the custom made module according to your special requirements.

Features

- No moving parts, no noise, and solid-state
- Compact structure, small in size, light in weight
- Environmental friendly
- RoHS compliant
- Precise temperature control
- Exceptionally reliable in quality, high performance


Application

- Food and beverage service refrigerator
- Portable cooler box for cars
- Liquid cooling
- Temperature stabilizer
- CPU cooler and scientific instrument
- Photonic and medical systems

Performance Specification Sheet

Th(°C)	27	50	Hot side temperature at environment: dry air, N ₂
DT _{max} (°C)	68	76	Temperature Difference between cold and hot side of the module when cooling capacity is zero at cold side
U _{max} (Voltage)	28.1	31.5	Voltage applied to the module at DT _{max}
I _{max} (amps)	12.0	12.0	DC current through the modules at DT _{max}
Q _{Cmax} (Watts)	224.0	245.6	Cooling capacity at cold side of the module under DT=0°C
AC resistance(ohms)	2.0~2.2	2.2~2.5	The module resistance is tested under AC

Geometric Characteristics Dimensions in millimeters

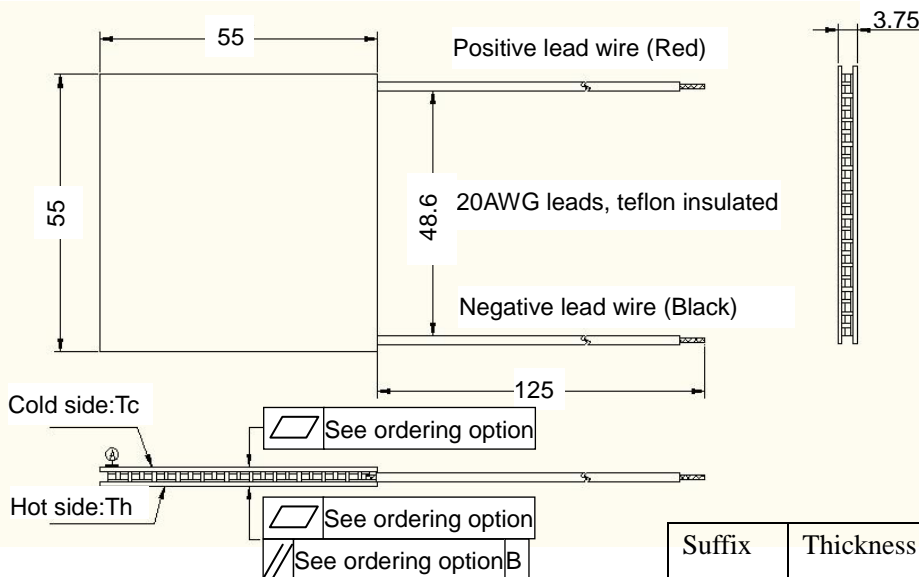

Sealing Option

Suffix	Sealant
NS	No sealing
SS	Silicone sealant
EPS	Epoxy
OS	Customer specify sealing other than above

Ordering Option

Suffix	Thickness (mm)	Flatness/ Parallelism (mm)	Lead wire length(mm) Standard/Optional length
TF	0:3.75±0.1	0: 0.04/0.04	125±1/Specify
TF	1:3.75±0.05	1: 0.03/0.03	125±1/Specify
TF	2:3.75±0.03	2: 0.02/0.02	125±1/Specify

Eg. TF01: Thickness 3.75±0.1(mm) and Flatness 0.03/0.03(mm)

Additional

Ceramic material: Alumina (Al₂O₃, white 96%)
Solder tinning: Copper Tin (CuSn) M.P. 227°C


Creative technology with fine manufacturing processes provides you the reliable and quality products.

Tel: +86-791-88198288 Fax: +86-791-88198308 Email: info@thermonamic.com Web Site: www.thermonamic.com


Specification of Thermoelectric Module

TEC1-24116T200


Performance Curves at $T_h=27^\circ\text{C}$

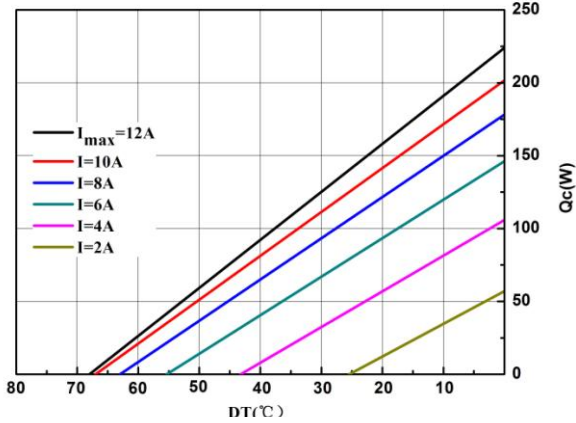

The chart for Q_c Vs DT under various currents

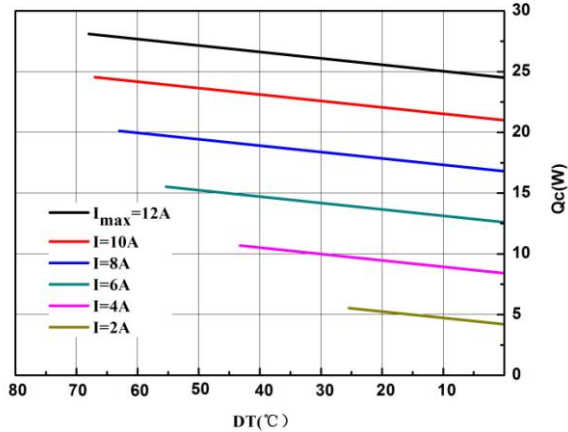


The chart for Voltage Vs DT under various currents

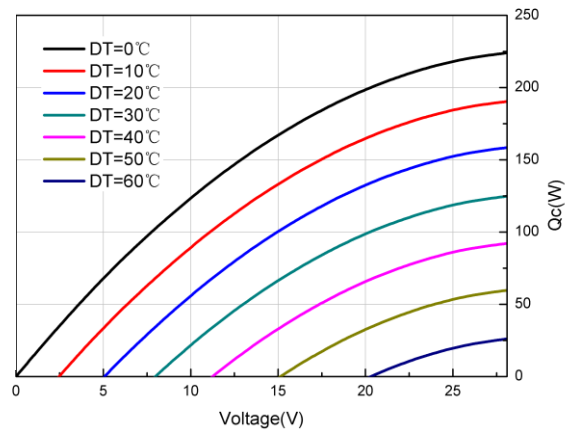


The chart for Q_c Vs Voltage(V) under various DT


Performance Curves at $T_h=50^\circ\text{C}$

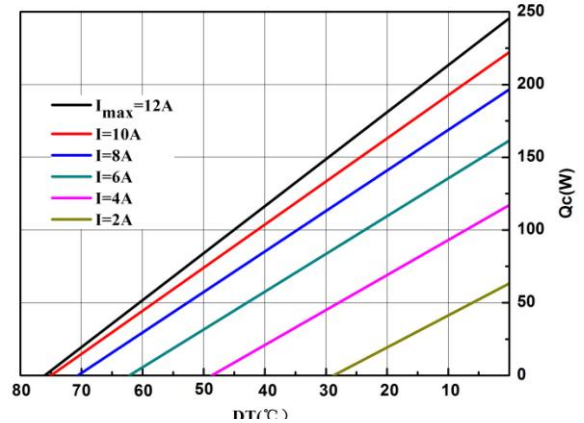

The chart for Q_c Vs DT under various currents

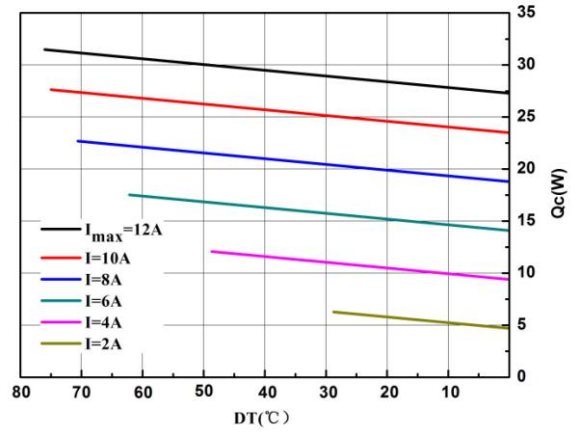

The chart for Voltage Vs DT under various currents

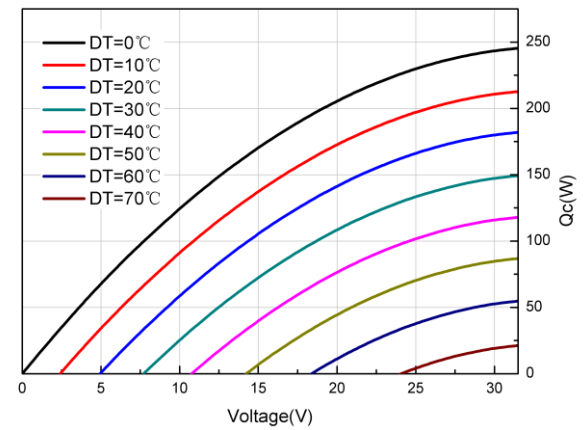

The chart for Q_c Vs Voltage(V) under various DT

Operation Cautions

- Cold side of the module stucked on the object being cooled
- Hot side of the module mounted on a heat radiator
- Work under DC
- Operation below I_{max} or V_{max}
- Operation or storage module below 180°C

Creative technology with fine manufacturing processes provides you the reliable and quality products.

Tel: +86-791-88198288 Fax: +86-791-88198308 Email: info@thermonamic.com Web Site: www.thermonamic.com